



BC



2,000 to 6,000 lb Capacity

INDUSTRIAL BURDEN CARRIER



Photo may show optional equipment

Trowin Industries, Inc.

3925 N Hastings Way * Eau Claire, WI 54703

715-839-7966 PH * 715-833-2181 FX

www.trowin.com

specifications



BC

2,000 to 6,000 Capacity 4-Wheel Industrial Burden Carrier



Engine: Volkswagen Industrial 1.8 ltr 4-Cylinder Gasoline Engine w/ Electronic Ignition (*std*)
Ford 1.6 ltr 4-Cylinder EFI Gasoline Engine w/ Engine Shut Down System (*opt*)(2003)
Ford 2.5 ltr 4-Cylinder EFI Gasoline Engine w/ Engine Shut Down System (*opt*)

Transmission: Ford A4LD Automatic Transmission, 2 or 3 Speeds Forward & 1 Reverse
Velvet Drive T72 Automatic Transmission 1 Speed Forward & Reverse

Drive Axle: Heavy Duty Automotive Type Mounted on Leaf Springs

Steer Axle: Heavy Duty Industrial Beam Mounted on Leaf Springs

Brakes: Service; 4-Wheel Split System, Power Assisted Disc Brakes Parking; Lever Operated on Transmission Output

Steering: Full-Time Power Assisted, Hydrostatic System

Electrical System: 12-Volt Negative Ground, 85 Amp Alternator, Keyed Anti-Restart Ignition, Horn, Sealed Beam Headlights (2), Sealed Beam Stop/Tail Lights (2)

Instrumentation: Gauges: Engine Hour Meter, Water Temperature, Fuel Level Warning Lights: Engine Temperature, Low Oil Pressure, Transmission Temperature, Voltage, Brake System Failure, Parking Brake Engaged

Tires: 580x 12 Pneumatic Foam Fill, Solid, Soft Ride Solid (*optional*)


Seat: Single Operator Metal Pan w/ Vinyl Padding & Adjuster

Frame: Laser Cut, Unitized All Welded Heavy Duty Construction, 2x4 Tubing Frame Rails, 3/8" Body Components, 1" Main Frame, Media Blasted for Superior Finish Adhesion

Finish: Primer: 2-part Grey Epoxy Primer Finish: 2-part Polyurethane (White, Yellow or Orange)(*std*)

Options: LPG, CNG, Diesel, Electric, Overhead Guard, Cab, Heater/Defroster, Back-up Alarm, Turn Signals, Tilt Steering, Suspension Seat, Couplers, Other Options Available Please Consult Dealer or Factory

Model #	BC-20	BC-30	BC-40	BC-50	BC-60
Capacity(lbs)	2,000	3,000	4,000	5,000	6,000

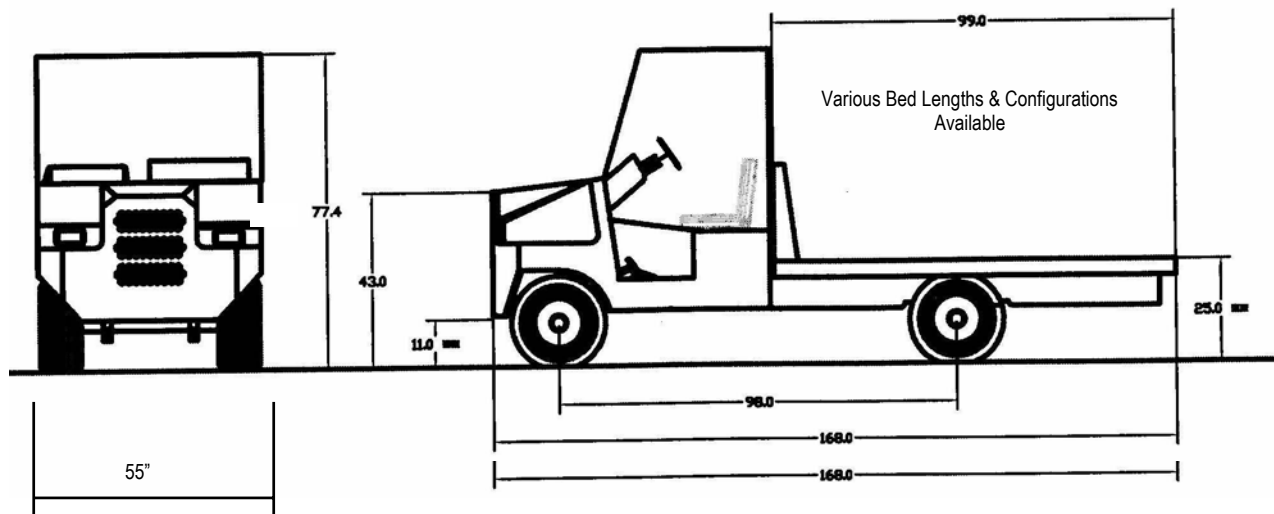

specifications subject to change without notice