

Trowin
INDUSTRIES, INC.®

'Built Your Way'

TOW TRACTORS • PUSH BACK TRACTORS • BURDEN CARRIERS • SPEED TRUCKS • CUSTOM CHASSIS'

MARK IV

**8,000 to 12,000 lbs DBP
Low Profile Tow Tractor**



PHOTO MAY SHOW OPTIONAL EQUIPMENT

Trowin Industries, Inc. • 737 Herbert St. • Chippewa Falls, WI 54729
Phone: 715-738-1690 • Fax: 715-738-1693 • info@trowin.com • www.trowin.com





'Built Your Way'

MARK IV

| DBP | GVW |
|-----------------|------------|
| 8,000 lbs..... | 10,000 lbs |
| 3,630 kg..... | 4,535 kg |
| 10,000 lbs..... | 12,500 lbs |
| 4,535 kg..... | 5,670 kg |
| 12,000 lbs..... | 15,000 lbs |
| 5,440 kg..... | 6,800 kg |

Towing Capacity is 10 times DBP*
GVW ± 5%

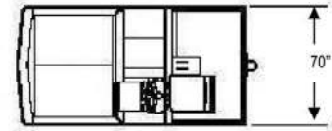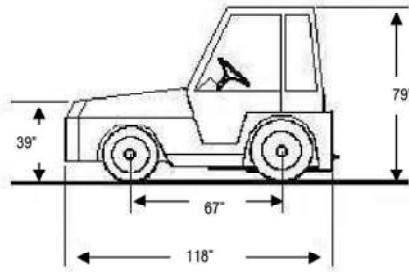

FUEL: Gasoline, Diesel, JP8*, LPG, CNG, Electric, Hybrid

ENGINE: Ford CSG637, 3.7 Ltr V-6, 106 HP, EFI, liquid cooled, electronic ignition, drive-by-wire

Kubota WG3800, 3.0 ltr 4-cylinder, 94 HP, EFI, liquid cooled, electronic ignition, drive-by-wire

Cummins QFS3.8 T4F 3.8 ltr 4-cylinder turbo, 74 HP, liquid cooled, DOC ONLY, TIER 4 FINAL

Deutz TD2.9 L4, 2.9 ltr, 4-cylinder non-turbo, 75 HP, liquid cooled DOC ONLY, TIER 4 FINAL

Kubota V3800, 3.8 ltr, 4-cylinder non-turbo, 74 HP, liquid cooled DOC ONLY, TIER 4 FINAL

Kohler KDI 2504, 2.5 ltr, 4-cylinder turbo, 74 HP, liquid cooled DOC ONLY, TIER 4 FINAL

Other engine choices available upon request.

TRANSMISSION:

PTCS GM 4L70, 4-speed forward, 1 speed reverse. (programmable lock-outs),

Ford 6R80, 6-speed forward (programmable lock-outs), 1 speed reverse.

Other transmission choices available

TIRES: Front: 225/75R16 E
Rear: 215/75R17.5 H

Dual rear wheels available

DRIVE AXLE: Newage 612 GSE double reduction axle, 12,000 lbs rating

STEER AXLE: 3" Tubular design with inclined king pins

SUSPENSION: Heavy duty leaf spring suspension, front & rear

STEER SYSTEM: Full-time hydrostatic power steering, 14" wheel

BRAKE SYSTEM: Power assisted, 4-wheel, dry disc, split system

PARK BRAKE: Lever operated on driveline

COOLING: Automotive style liquid cooled, rubber mounted radiator

ELECTRICAL: 12-Volt negative ground, LED recessed headlights, stop/tail and reverse lights (2ea), Keyed anti-restart ignition, horn

INSTRUMENTATION: 3.5" Color Multifunction programmable display
OTHER WARNING LIGHTS: Park brake engaged and brake system failure.

FRAME: Unitized all steel welded construction, 2" front/rear bumpers, 2" main frame members, 3/8" body panels, media blasted

FINISH: 2-part epoxy primer, 2-part polyurethane top coat. White, Yellow or Orange Standard Colors

OPTIONS: Cab, Canopy, Overhead Guard, Beacon/Strobe, Back-up Alarm, Heater/Defroster, Air Conditioning, Air Compressor, Mirrors, Turn Signals, Passenger Seat, Suspension Seats, hitches, Customer Colors

Other options available upon request



*Specifications subject to change without notice
REV 1/19*